





Duo Midi LED p287



Duet LED Bollard p346

Iluminación Exterior



Decorative Ceiling/Wall



Architectural Die-Cast Wall




Directional Wall



Decorative Ceiling / Wall



Polycarbonate Ceiling / Wall

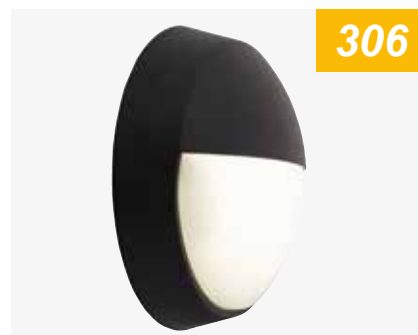

Bulkheads



320

Recessed Wall



329

Lanterns and Half Lanterns



334

Bollards



352

Portable Lanterns




354

Feature Landscape Illumination



358



Inground Uplights and Controllers

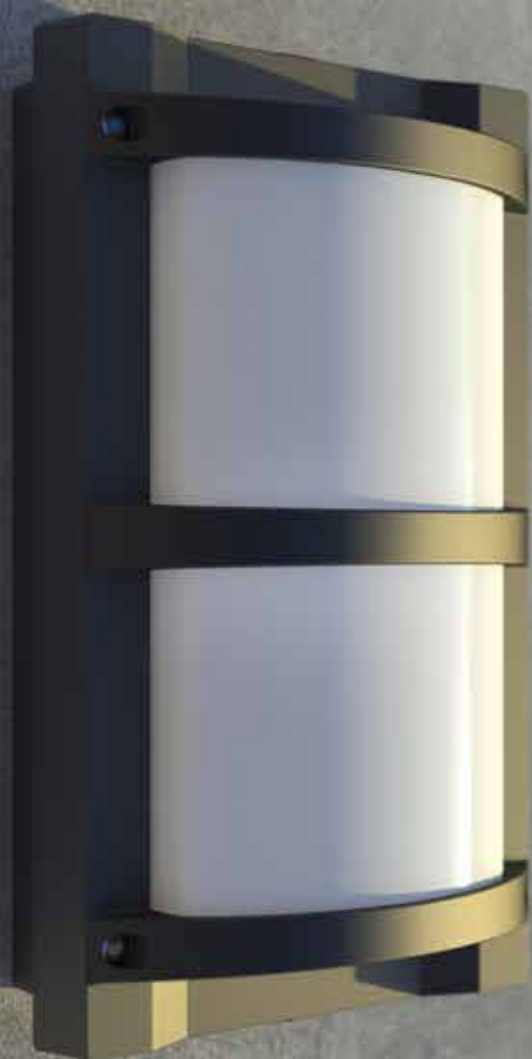

Diseñado para
Entregar...

Foco de superficie fijo y ajustable, Reef LED CCT



Driver Incluido



AREELED
Fixed Downlight
Cool White



AREELED
Adjustable Downlight
Cool White

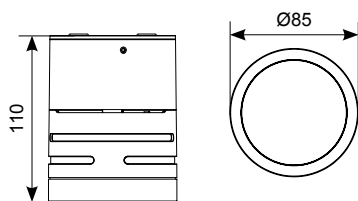

AREELED
Warm White



AREELED
Daylight




AREELED
Warm White



AREELED
Daylight


Soporte de montaje único mediante clic y bloqueo



El interruptor integral CCT permite al instalador elegir entre las opciones de temperatura de color de 3000 K, 4000K y 6000K.



1. Fije a la pared la placa de montaje desmontable y conecte el cable de alimentación. Monte la carcasa sobre el lugar de fijación



2. Alinee la carcasa sobre la placa de montaje, gírela en su lugar y atornille con la llave Allen para asegurar la fijación a la pared

W	5W
Lm/D	
3000K	450lm
4000K	486lm
6000K	471lm
Lm/W	
3000K	90lm
4000K	97lm
6000K	94lm
CRI	Ra 80
CCT	3000K
	4000K
	6000K
V	230V
Hz	50Hz
Temp	-20°C to 40°C

Fijo	AREELED	LED	5W - 3000K/4000K/6000K
Ajustable	AREELED A	LED	5W - 3000K/4000K/6000K - White



Furia AC LED

No Necesita Driver

256





AFULED/W



AFULED/GR

AFULED/W	LED	10W 3000K	● W
AFULED/GR	LED	10W 3000K	● GR

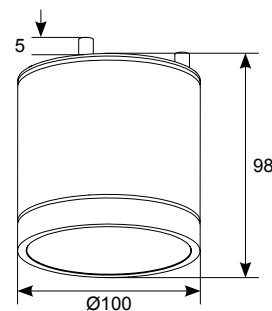

W	10W
Lm/D	719lm
Lm/W	74lm
CRI	Ra 80
CCT	3000K
V	230V
Hz	50/60Hz
Temp	-20°C - 40°C







Galia LED

Driver Incluido







Llave Allen



W	10W
Lm/D	300lm
Lm/W	30lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 25°C

AGALSQLED	LED	10W 4000K
-----------	-----	-----------



Llave Allen

W	10W
Lm/D	360lm
Lm/W	36lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 25°C

AMATROLED	LED	10W 4000K
-----------	-----	-----------



Kappa LED

Driver Incluido

260




AKLED/B/WW






AKLED/SG

AKLED/B	LED	4.5W 4000K - ● B
AKLED/SG	LED	4.5W 4000K - ● SG
AKLED/B/WW	LED	4.5W 3000K - ● B
AKLED/SG/WW	LED	4.5W 3000K - ● SG

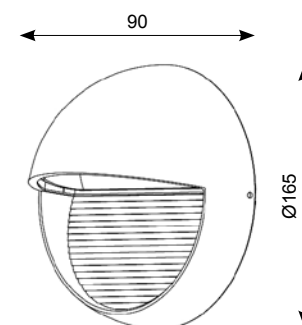

W	4.5W
Lm/D	
4000K	270lm
3000K	117lm
Lm/W	
4000K	60lm
3000K	26lm
CRI	Ra 70
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	0°C to 25°C

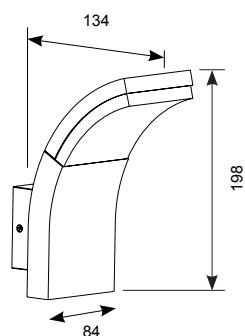

Senza LED Bollard
p339


W	6.5W
Lm/D	366lm
Lm/W	52lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C - 45°C



ASELED/WL




ASELED/WL/PIR

ASELED/WL	LED	6.5W 4000K
ASELED/WL/PIR	LED	6.5W 4000K 

Arco LED

Driver Incluido

262




AARLED/WL LED 11W 4000K

W	11W
Lm/D	643lm
Lm/W	58lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 45°C

Tempo LED




Driver Incluido



ATLED/WL



ATLED/WL/PIR

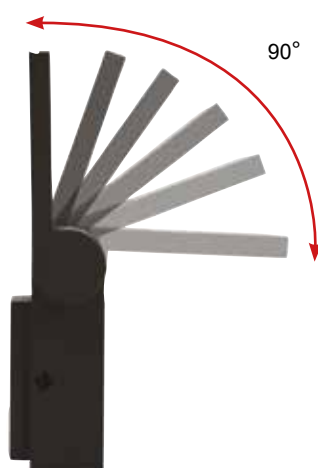

W	10W
Lm/D	738lm
Lm/W	73lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 45°C

ATLED/WL	LED	10W 4000K
ATLED/WL/PIR	LED	10W 4000K 




Dolce LED

Driver Incluido



ADOCLED/WL




W	10W
Lm/D	690lm
Lm/W	76lm
CRI	Ra 80
CCT	4000K
V	100/240V
Hz	50/60Hz
Temp	-20°C-45°C



ADOCLED/WL	LED	10W 4000K
------------	-----	-----------

Pavia Solar LED


Driver Incluido



265



Modos operativos



Funciona con energía solar

Lm/D	230lm
CRI	Ra 80
CCT	4000K
Temp	-20°C - 45°C


APAVLED/WL	LED	4000K
<i>Batería</i>		
ASBP/17	7.4V 1500mAh Li-ION Bateria de Repuesto	





Talana Solar LED


Driver Incluido



267




6 - 10m
1 min
10 - 45 LUX



Lm/D	210lm
CRI	Ra 80
CCT	4000K
Temp	-20°C - 45°C




Modos operativos



Funciona con energía solar





ATASLED/WL	LED	4000K
Batería		
ASBP/17	7.4V 1500mAh Li-ION Batería de Repuesto	



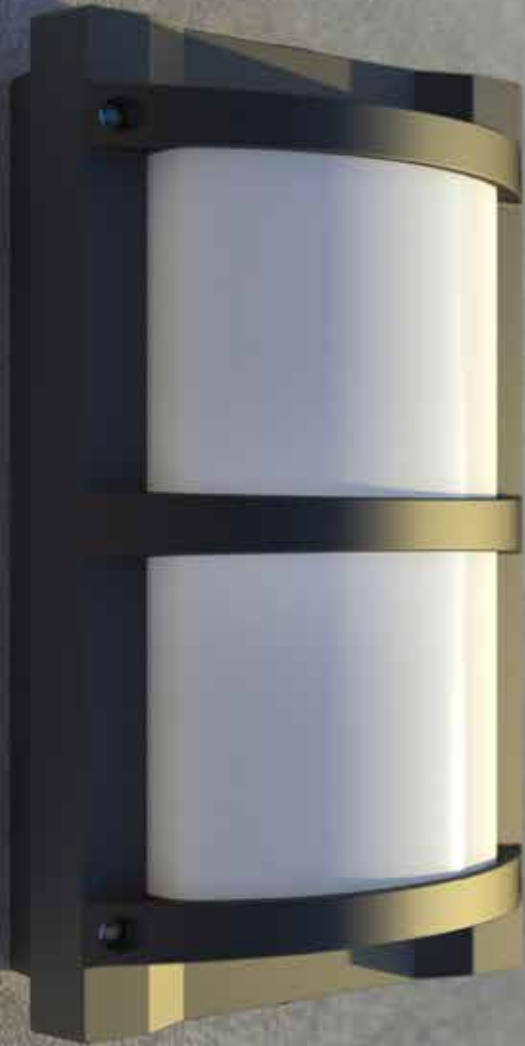

Tridon LED CCT

Driver Incluido



Powered by
TRIDONIC
enlightening your ideas



ATRILED/B
3000K



ATRILED/G
4000K

W	8W
Lm/D	
4000K	701lm
3000K	695lm
Lm/W	
4000K	88lm
3000K	87lm
CRI	Ra 80
CCT	3000K 4000K
V	220-240V
Hz	50/60Hz
Temp	-20°C - 25°C

ATRILED/B	LED	8W - 4000K/3000K -	
ATRILED/G	LED	8W - 4000K/3000K -	

/PC	
/MWS	



Lucca LED CCT

Driver Incluido

270



ALUCLED/B



ALUCLED/G




Interruptores integrales para opciones de CCT seleccionables y multivarios.



Powered by
TRIDONIC
enlightening your ideas



Cubierta de entrada de conducto extraíble de 20 mm para facilitar la instalación

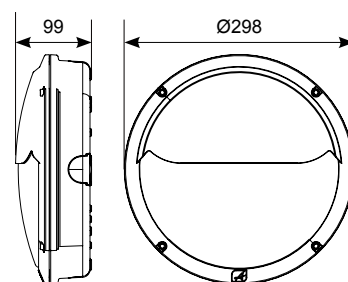

ALUCLED/B	LED	18W/27W - 4000K/3000K - ● B
ALUCLED/G	LED	18W/27W - 4000K/3000K - ● G



/PC	
/M3	
/SM3	
/DM3	
/MWS	

W	18W/27W	
Lm/D	4000K	3000K
18W	1149lm	1091lm
27W	1622lm	1563lm
Lm/W 18W	64lm	61lm
Lm/W 27W	60lm	58lm
CRI	Ra 80	
CCT	4000K 3000K	
V	220-240V	
Hz	50/60Hz	
Temp	-20°C - 25°C	

Nappa LED CCT


Driver Incluido

271



ANAPLED/B


ANAPLED/G



Interruptores integrales para opciones de CCT seleccionables y multivarios.

Powered by **TRIDONIC**
enlightening your ideas

Cubierta de entrada de conducto extraíble de 20 mm para facilitar la instalación

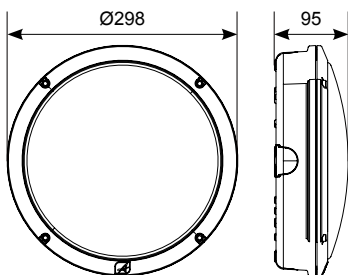

W	18W/27W	
Lm/D	4000K	3000K
18W	2104lm	2012lm
27W	3065lm	2924lm
Lm/W 18W	117lm	112lm
Lm/W 27W	114lm	108lm
CRI	Ra 80	
CCT	4000K	3000K
V	220-240V	
Hz	50/60Hz	
Temp	-20°C - 25°C	

ANAPLED/B	LED	18W/27W - 4000K/3000K - ● B
ANAPLED/G	LED	18W/27W - 4000K/3000K - ● G



/PC	
/M3	
/SM3	
/DM3	
/MWS	



Dugas

Lámpara No Incluida

272

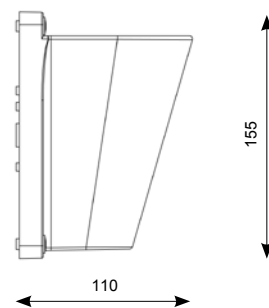



ADU50

GU10

50W

Duo Midi

Lámpara No Incluida

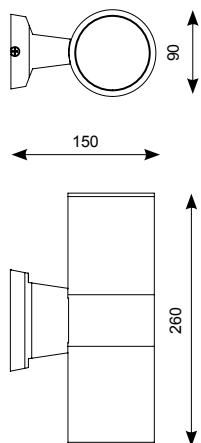

ADM50GU10


ADM50GU10/SG

ADM50GU10	GU10	2 x 50W	● B
ADM50GU10/SG	GU10	2 x 50W	● SG



Tandem

Lámpara No Incluida



ATA2X50

GU10


2 x 50W



Riola

Lámpara No Incluida

276

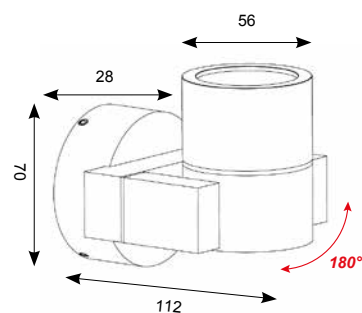

ARGU10



GU10

35W

Corvus

Lámpara No Incluida

277

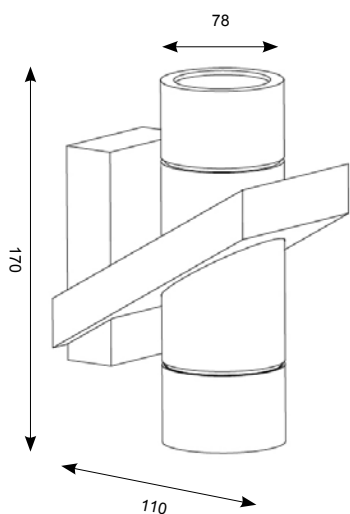

ACO2X35

GU10


2 x 35W



Reef LED CCT Bi-directional Wall Light

Driver Incluido

278



AREELEDWL
4000K



AREELEDWL/PIR
3000K



AREELEDWL
6000K



El interruptor integral CCT permite al instalador elegir entre las opciones de temperatura de color de 3000 K, 4000K y 6000K.

Soporte de montaje único mediante clic y bloqueo




1. Fije a la pared la placa de montaje desmontable y conecte el cable de alimentación. Monte la carcasa sobre el lugar de fijación



2. Alinee la carcasa sobre la placa de montaje, gírela en su lugar y atornille con la llave Allen para asegurar la fijación a la pared



1 - 10m
5secs-12 min
3 - 1000 LUX

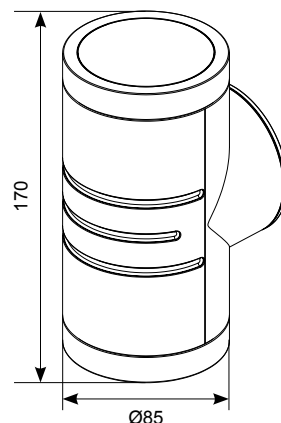


W	10W
Lm/D	
3000K	815lm
4000K	885lm
6000K	860lm
Lm/W	
3000K	82lm
4000K	89lm
6000K	86lm
CRI	Ra 80
CCT	3000K 4000K 6000K
V	230V
Hz	50Hz
Temp	-20°C to 40°C

AREELEDWL LED 10W - 3000K/4000K/6000K



AREELEDWL/PIR LED 10W - 3000K/4000K/6000K -

Antila LED

Driver Incluido



279

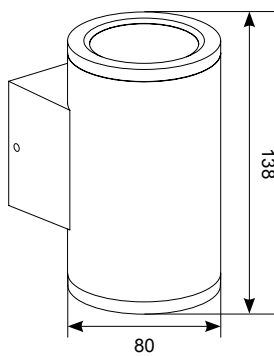

W	12W
Lm/D	406lm
Lm/W	37lm
CRI	Ra 80
CCT	4000K
V	230V
Hz	50Hz
Temp	-20°C - 50°C






ANTIALED

LED

12W 4000K





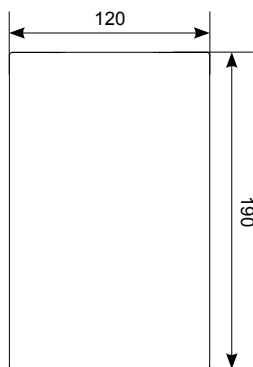

W	12W
Lm/D	491lm
Lm/W	41lm
CRI	Ra 80
CCT	4000K
V	230V
Hz	50Hz
Temp	-20°C - 50°C




AZATLED	LED	12W 4000K
---------	-----	-----------



Segano LED



Driver Incluido

282



ASEGLED LED 13W 4000K

W	13W
Lm/D	610lm
Lm/W	47lm
CRI	Ra 80
CCT	4000K
V	230V
Hz	50Hz
Temp	-20°C - 50°C



W	11W
Lm/D	202lm
Lm/W	18lm
CRI	Ra 93
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 40°C




AGLED/WL	LED	11W 4000K
----------	-----	-----------



Brock LED

Driver Incluido

284

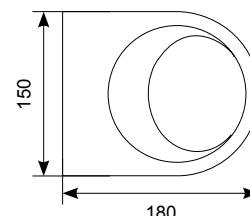

W	7.7W
Lm/D	
4000K	452lm
3000K	448lm
Lm/W	
4000K	57lm
3000K	56lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50Hz
Temp	-20°C - 25°C

ABRLED/WL/CW LED 7.7W - 4000K




ABRLED/WL/WW LED 7.7W - 3000K





Duo Midi LED

Driver Incluido

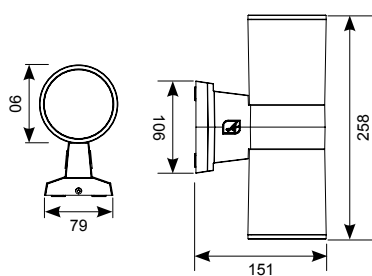

ADMLED1/GR/CW

W	19W 42W
Lm/D	
19W	1752lm
42W	3582lm
Lm/W 19W	92lm
Lm/W 42W	85lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C - 25°C


ADMLED1/GR/CW	LED	19W 4000K	● GR
ADMLED2/GR/CW	LED	42W 4000K	● GR






Doppio LED

Driver Incluso



289

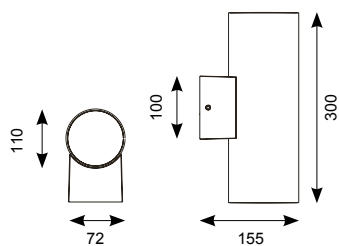

W	34W
Lm/D	2 x 848lm
Lm/W	50lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 40°C



ADOLEDWL LED 34W 4000K



Doppio HP LED

Driver Incluso

290

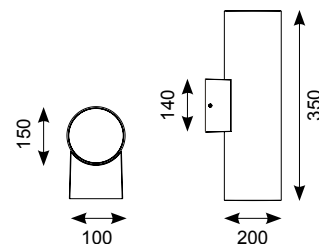







W	56W
Lm/D	2x2573lm
Lm/W	91lm
CRI	Ra 80
CCT	4000K
V	230V
Hz	50/60Hz
Temp	-20°C to 40°C

ADOLEDWL/HP LED 56W - 4000K

Alto LED

Driver Incluido

291

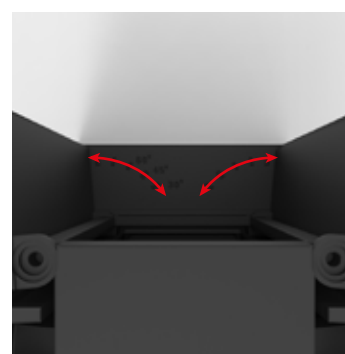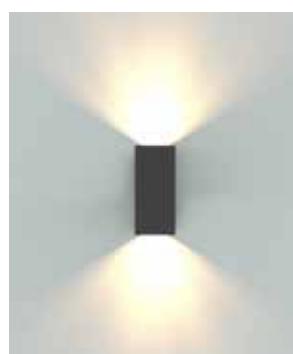

Ajuste independiente del ángulo del haz

W	6W
Lm/D	205lm
Lm/W	34lm
CRI	Ra 80
CCT	4000K
V	230V
Hz	50Hz
Temp	-10°C - 50°C

ALTOLED LED 6W - 4000K



Eclipse MultiLED CCT

Driver Incluido





AECLD/CH/CCT



AECLD/W/CCT



AECLD/SC/CCT



AECLD/W/CCT	LED	11W/14W/25W -	W
AECLD/CH/CCT	LED	11W/14W/25W -	CH
AECLD/SC/CCT	LED	11W/14W/25W -	SC

/M3		
/DD		(DD1/DD2/DD3/DD4 - 25W only)
/MWS		


W	11W/14W/25W		
Lm/D	3000K	4000K	6500K
11W	1165lm	1193lm	1202lm
14W	1454lm	1493lm	1491lm
25W	2700lm	2846lm	2762lm
Lm/W 11W	106lm	108lm	109lm
Lm/W 14W	104lm	107lm	107lm
Lm/W 25W	108lm	114lm	110lm
CRI	Ra 80		
CCT	3000K 4000K 6500K		
V	230V		
Hz	50/60Hz		
Temp	-10°C to 25°C		



Mercury CCT LED

Driver Incluido

294




AMERLED/CCT

Powered by
TRIDONIC
enlightening your ideas



AMERLED/CCT + AMERLEDBZ/CH

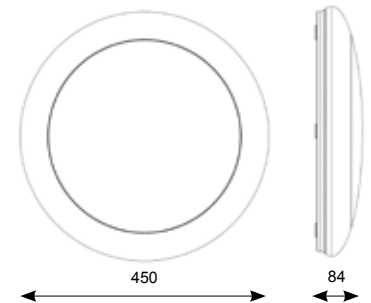

AMERLED/CCT	LED	19W 3000K/4000K	
AMERLED/HP	LED	33W 4000K	

/M3		
/OCTO		
/DD		(DD1/DD2/DD3)
/MWS		

Accesorios



AMERLEDBZ/CH		CH
---------------------	--	-----------

W	19W	33W
Lm/D	4000K	3000K
19W	1655lm	1420lm
33W	N/A	2702lm
Lm/W 19W	87lm	71lm
Lm/W 33W	N/A	82lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	230V	
Hz	50/60Hz	
Temp	-10°C - 40°C	

Beta LED

Driver Incluido

295

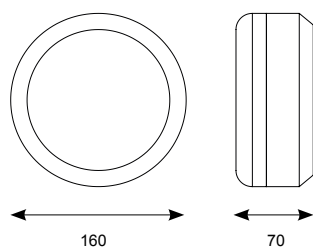

W	5W
Lm/D	436lm
Lm/W	87lm
CRI	Ra 70
CCT	4000K
V	220V-240V
Hz	50Hz
Temp	0°C - 25°C

ABELED/WV	LED	5W 4000K
-----------	-----	----------



Gamma Mini LED

Driver Incluido


296



AMGAMLED



AMGAMLED + AMGAMLEDBZ/CH

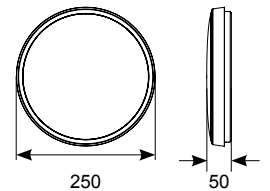

AMGAMLED	LED	11W 4000K
AMGAMLED/WW	LED	11W 3000K

/M3	
/MWS	

Accesorios

AMGAMLEDBZ/CH		CH
----------------------	--	-----------



W	11W
Lm/D	
4000K	1031lm
3000K	971lm
Lm/W 4000K	94lm
Lm/W 3000K	88lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50Hz
Temp	-5°C - 35°C

Gamma Mini LED CCT

Driver Incluido





297

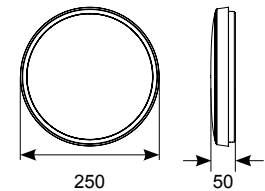

AMGAMLED/CCT



AMGAMLED/CCT + AMGAMLEDBZ/CH

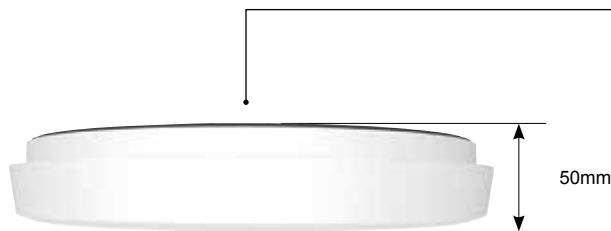

Interruptor de temperatura de cambio de color seleccionable entre 3000K y 4000K

W	10W
Lm/D	
4000K	1148lm
3000K	1053lm
Lm/W 4000K	115lm
Lm/W 3000K	105lm
CRI	Ra 80
CCT	4000K 3000K
V	220-240V
Hz	50/60Hz
Temp	-5°C to 35°C

AMGAMLED/CCT	LED	10W - 4000K/3000K
/M3		
/MWS		
AMGAMLEDBZ/CH		CH



Gamma LED

Driver Incluido


298



AGAMLED



AGAMLED + AGAMLEDBZ/CH

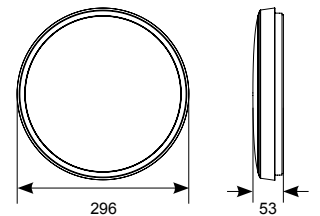

AGAMLED	LED	18W 4000K
AGAMLED/WW	LED	18W 3000K

/M3	
/MWS	



Accesorios

AGAMLEDBZ/CH		CH
--------------	--	----



W	18W
Lm/D	
4000K	1675lm
3000K	1551lm
Lm/W 4000K	93lm
Lm/W 3000K	86lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-230V
Hz	50Hz
Temp	-5°C - 35°C

Gamma LED CCT

Supplied c/w Integral Driver

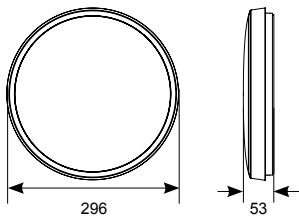

AGAMLED/CCT + AGAMLEDBZ/CH

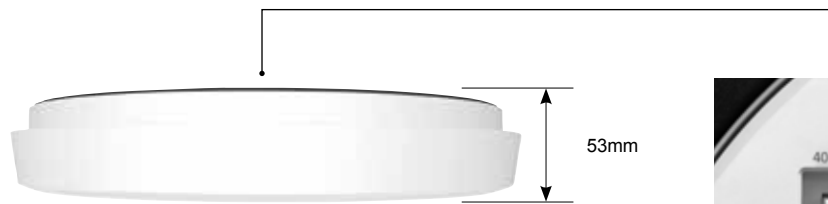

Interruptor de temperatura de cambio de color seleccionable entre 3000K y 4000K

W	17W
Lm/D	
4000K	1847lm
3000K	1681lm
Lm/W 4000K	106lm
Lm/W 3000K	96lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	-5°C to 35°C

AGAMLED/CCT	LED	17W - 4000K / 3000K
-------------	-----	---------------------

/M3	
/MWS	

Accesorios

AGAMLEDBZ/CH	
--------------	--



Jazz LED

Driver Incluido



300



AJALED



AJALED + AJALED BZ/CH

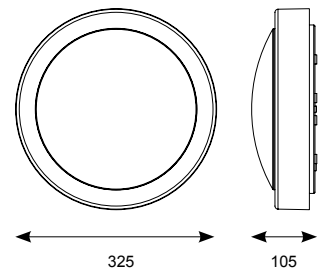

AJALED	LED	14W 4000K
--------	-----	-----------

/M3	
/MWS	
/MWS/M3/CF	



Accesorios

AJALED BZ/CH		CH
--------------	--	----


W	14W
Lm/D	993lm
Lm/W	66lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	0°C - 25°C

Disco Slim LED CCT

Supplied c/w Integral Driver

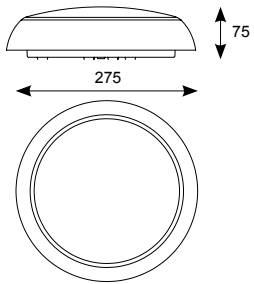

ADSILED1/CCT



ADSILED2/CCT

4000K 3000K

Total (Watts)	8W	13W
Lm/D	643lm	575lm
	1083lm	1027lm
Lm/W	92lm	82lm
	83lm	79lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	230V	
Hz	50Hz	
Temp	-10°C to 25°C	



ADSILED1/CCT

IP65



ADSILED1/CCT +
ADSILED/1BZ/CH



ADSILED1/CCT +
ADSILED/1BZ/GR

ADSILED1/CCT	LED	8W - 4000K/3000K
ADSILED2/CCT	LED	13W - 4000K/3000K

/M3		(13W only)
/MWS		(13W only)

Accesorios

ADSILED/1BZ/CH		CH	(8W)
ADSILED/1BZ/GR		GR	(8W)
ADSILED/2BZ/CH		CH	(13W)
ADSILED/2BZ/GR		GR	(13W)



Disco Slim LED

Driver Incluido

302



ADSILED2



ADSILED1 + ADSILED/1BZ/CH

ADSILED1 + ADSILED/1BZ/GR





ADSILED1	LED	8W 4000K
ADSILED1/WW	LED	8W 3000K

ADSILED2	LED	13W 4000K
ADSILED2/WW	LED	13W 3000K



/M3		(Solo 13W)
/MWS		(Solo 13W)
/MWS/M3/CF		(Solo 13W)

Accesorios

ADSILED/1BZ/CH		CH	(8W)
ADSILED/1BZ/GR		GR	(8W)
ADSILED/2BZ/CH		CH	(13W)
ADSILED/2BZ/GR		GR	(13W)



ADSILED1





ADSILED2


	4000K	3000K
W	8W	13W
Lm/D	584lm	547lm
	1021lm	979lm
Lm/W	73lm	68lm
	79lm	75lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	220V-240V	
Hz	50Hz	
Temp	-10°C - 25°C	

Disco Slim Halo LED

Driver Incluido



ADSIHLED1

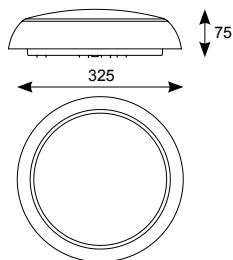

ADSIHLED2

4000K 3000K

W	8W	13W
Lm/D	687lm	605lm
	1198lm	1064lm
Lm/W	86lm	87lm
	92lm	82lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	220V-240V	
Hz	50Hz	
Temp	-10°C - 25°C	



ADSIHLED2



ADSIHLED1 + ADSILED/1BZ/CH



ADSIHLED1 + ADSILED/1BZ/GR



ADSIHLED1	LED	8W 4000K
ADSIHLED1/WW	LED	8W 3000K

ADSIHLED2	LED	13W 4000K
ADSIHLED2/WW	LED	13W 3000K

/M3		(Solo 13W)
/MWS		(Solo 13W)
/MWS/M3/CF		(Solo 13W)

Accesorios

ADSILED/1BZ/CH		CH	(8W)
ADSILED/1BZ/GR		GR	(8W)
ADSILED/2BZ/CH		CH	(13W)
ADSILED/2BZ/GR		GR	(13W)



Disco LED

Driver Incluido

304



ADILED1





ADILED2

ADILED1	LED	8W 4000K
ADILED2	LED	14W 4000K


/M3		(Solo 14W)
/MWS		(Solo 14W)
/MWS/M3/CF		(Solo 14W)

Accesorios

ADI28BZ/BR		BR	(14W)
ADI28BZ/CH		CH	(14W)
ADI28BZ/SG		SG	(14W)



ADILED1



ADILED2

W	8W 14W
Lm/D	539lm 860lm
Lm/W	67lm 61lm
CRI	Ra 70
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C-25°C



Astro LED CCT

Driver Incluido

306





AALED1/BV/CCT




AALED1/WV/CCT



AALED2/WV/CCT



AALED1/CCT



AALED2/CCT

AALED1/BV/CCT	LED	7W - 4000K/3000K - ● BV
AALED1/WV/CCT	LED	7W - 4000K/3000K - ● WV



AALED2/BV/CCT	LED	14W - 4000K/3000K - ● BV
AALED2/WV/CCT	LED	14W - 4000K/3000K - ● WV

/PC		
/M3		(14W only)
/MWS		(14W only)


W	7W / 14W	
Lm/D	4000K	3000K
7W	655lm	606lm
14W	1269lm	1170lm
Lm/W 7W	94lm	87lm
Lm/W 14W	91lm	84lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	230V	
Hz	50Hz	
Temp	-10°C to 25°C	

Delta LED CCT

Driver Incluido



ADLED1/CCT

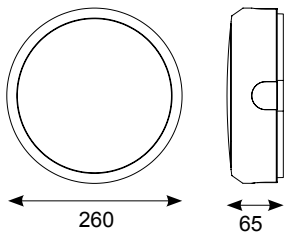

ADLED2/CCT



ADLED1/BV/CCT



ADLED1/WV/CCT
(Fitted with Trim Attachment)



ADLED2/BV/CCT
(Fitted with Louvred Bezel Trim)

ADLED1/BV/CCT	LED	6W - 4000K/3000K - ●	BV
ADLED1/WV/CCT	LED	6W - 4000K/3000K - ●	WV

ADLED2/BV/CCT	LED	14W - 4000K/3000K - ●	BV
ADLED2/WV/CCT	LED	14W - 4000K/3000K - ●	WV

/PC		
/M3		(14W only)
/MWS		(14W only)

ADLED2/BZ/EYE/B	●	B	(14W Only)
ADLED2/BZ/EYE/W	●	W	(14W Only)
ADLED2/BZ/GRILL/B	●	B	(14W Only)
ADLED2/BZ/GRILL/W	●	W	(14W Only)





W	6W / 14W	
Lm/D	4000K	3000K
6W	670lm	628lm
14W	1271lm	1190lm
Lm/W 6W	112lm	105lm
Lm/W 14W	91lm	85lm
CRI	Ra 80	
CCT	4000K	3000K
V	230V	
Hz	50Hz	
Temp	-10°C to 25°C	





Mini Vision 3 LED

Driver Incluido

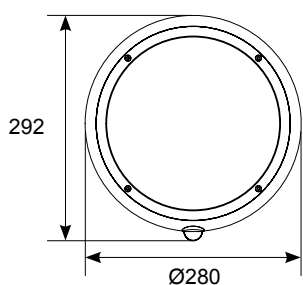

AVIMLED/GR



AVIMLED/SG



AVIMLED/W

W	9W
Lm/D	797lm
Lm/W	89lm*
CRI	Ra 80
CCT	4000K
V	230V
Hz	50/60Hz
Temp	-10°C-50°C

AVIMLED/GR	LED	9W 4000K	● GR
AVIMLED/SG	LED	9W 4000K	● SG
AVIMLED/W	LED	9W 4000K	● W

/PC	
-----	--



Vision 3 CCT LED

Driver Incluido



AVILED/CCT/GR



Powered by
TRIDONIC
enlightening your ideas



AVILED/CCT/SG



AVILED/CCT/W

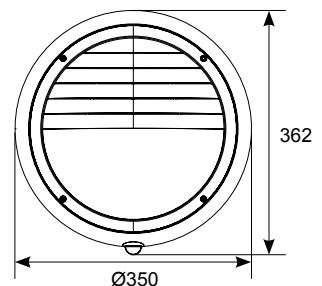

AVILED/CCT/GR	LED	17W 4000K/3000K	● GR
AVILED/CCT/SG	LED	17W 4000K/3000K	● SG
AVILED/CCT/W	LED	17W 4000K/3000K	● W

/PC		
/M3		
/DD		(DD1/DD2/DD3/DD4)
/MWS		

W	17W
Lm/D	
4000K	1420lm
3000K	1324lm
Lm/W 4000K	84lm*
Lm/W 3000K	83lm*
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	-10°C -40°C

Vision 3 HP LED

Driver Incluido

311




Powered by
TRIDONIC
enlightening your ideas



AVILED/SG

AVILED/W

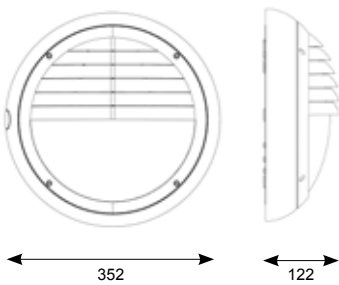

W	31W
Lm/D	2426lm
Lm/W	78lm*
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C - 50°C

AVILED/HP/GR	LED	31W 4000K	● GR
AVILED/HP/SG	LED	31W 4000K	● SG
AVILED/HP/W	LED	31W 4000K	● W

/PC		
/M3		
/DD		(DD1/DD2/DD3/DD4)
/MWS		



Helder LED Circular Bulkhead

Driver Incluido

312



AHELED/CB/CCT



AHELED/CW/CCT/PIR



AHELED/EB/CCT



El PIR ajustable permite controlar el retardo temporal y la configuración de los LUX.




Tiempo ajustable entre 10 segundos y 5 minutos



LUX ajustables entre 10 y 2000 LUX



10m
10 sec - 5mins
10 - 2000 LUX

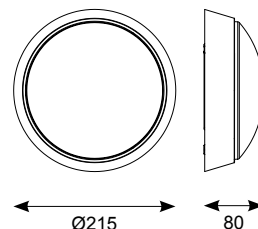


	AHELED/CB	LED	14W - 4000K	● B
	AHELED/CW	LED	14W - 4000K	● W
	AHELED/CB/PIR	LED	14W - 4000K	● B
	AHELED/CW/PIR	LED	14W - 4000K	● W
	AHELED/EB	LED	14W - 4000K	● B
	AHELED/EW	LED	14W - 4000K	● W
	AHELED/EB/PIR	LED	14W - 4000K	● B
	AHELED/EW/PIR	LED	14W - 4000K	● W


W	14W
Lm/D	
Standard	972lm
Eyelid	529lm
PIR	1011lm
Lm/W	
Standard	70lm
Eyelid	38lm
PIR	72lm
CRI	Ra 80
CCT	4000K
V	220-240V
Hz	50/60Hz
Temp	-20°C to 40°C

Helder LED Oval Bulkhead

Driver Incluido



10m
10 sec - 5mins
10 - 2000 LUX

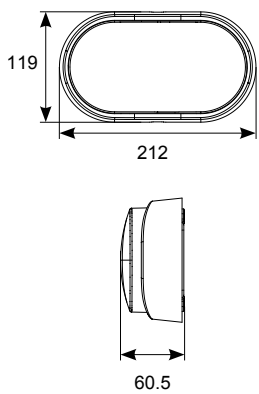

AHELED/OW/CCT/PIR




AHELED/OB/CCT

W	14W
Lm/D	
Standard	887lm
PIR	925lm
Lm/W	
Standard	63lm
PIR	66lm
CRI	Ra 80
CCT	4000K
V	220-240V
Hz	50/60Hz
Temp	-20°C to 40°C

	AHELED/OB	LED	14W - 4000K	● B
	AHELED/OW	LED	14W - 4000K	● W
	AHELED/OB/PIR	LED	14W - 4000K	● B
	AHELED/OW/PIR	LED	14W - 4000K	● W





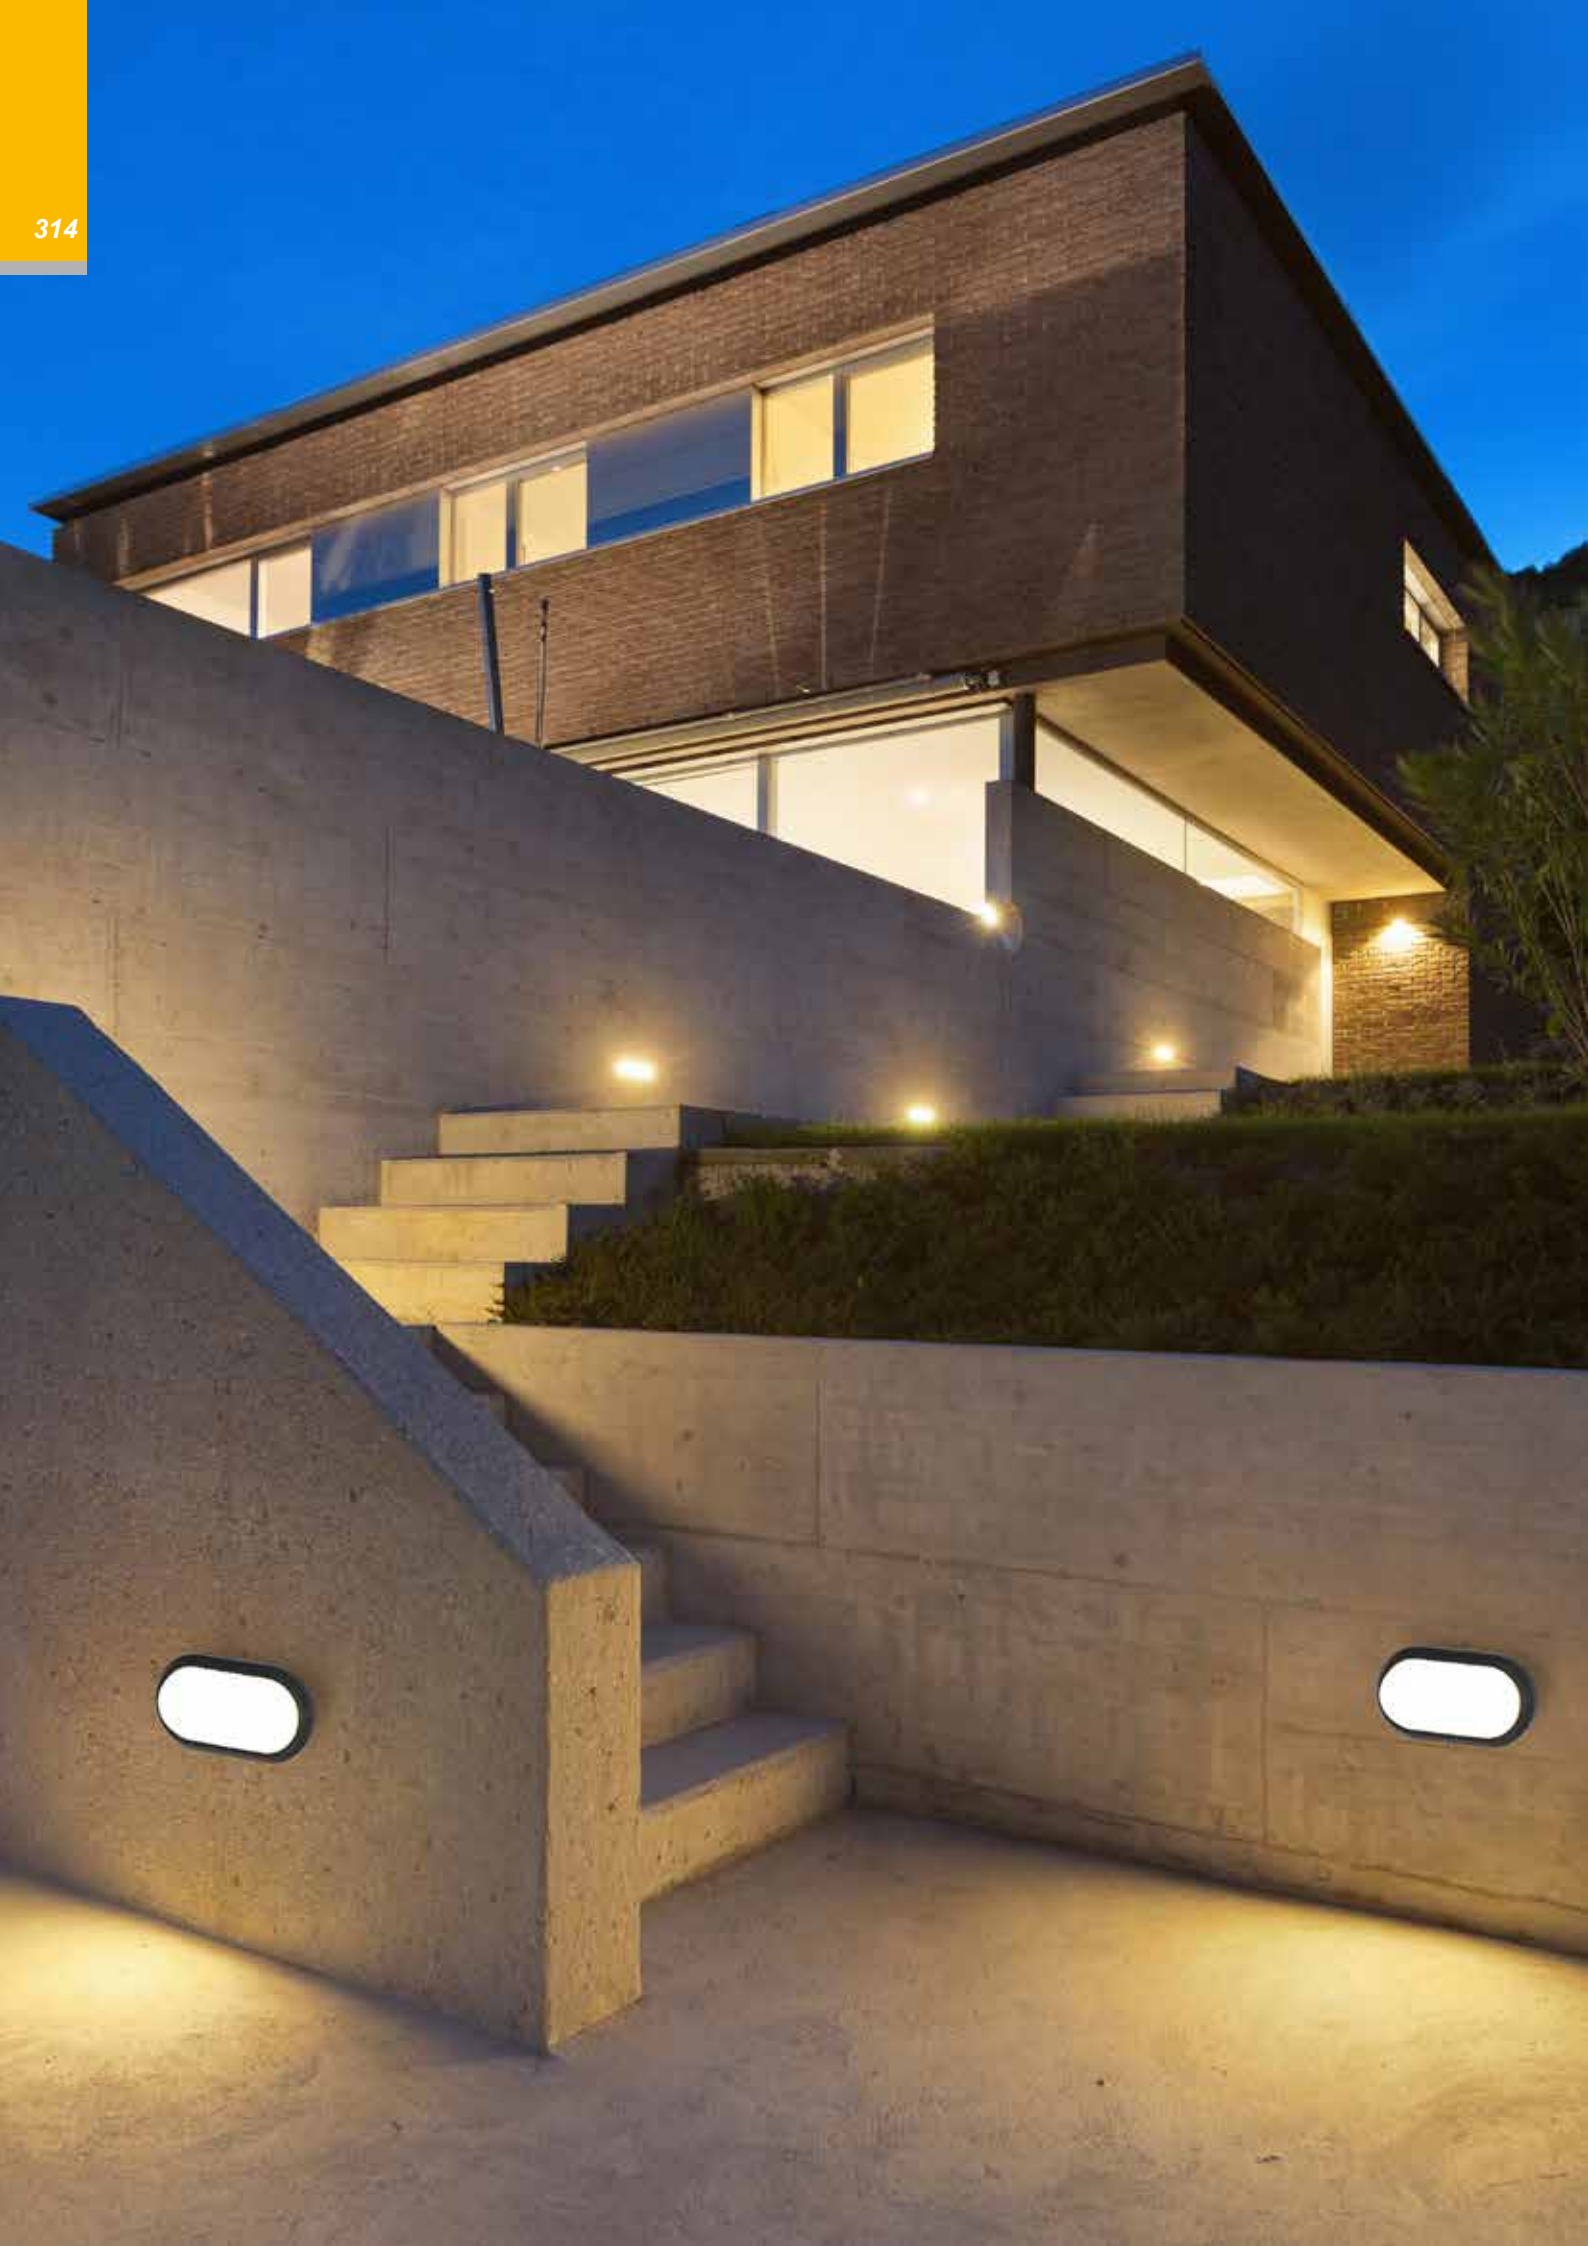


Sorrento 2 LED CCT

Driver Incluido



315

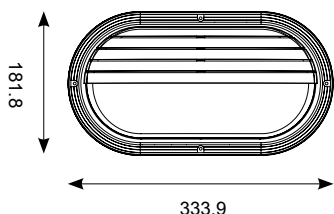

ASR2LED/W/CCT



ASR2LED/B/CCT



ASR2LED/B/CCT



ASR2LED/W/CCT

W	8W
Lm/D	
4000K	721lm
3000K	662lm
Lm/W	
4000K	90lm
3000K	83lm
CRI	Ra 80
CCT	4000K 3000K
V	230V
Hz	50/60Hz
Temp	-0°C to 25°C



ASR2LED/B/CCT	LED	8W - 4000K/3000K - ● B
ASR2LED/W/CCT	LED	8W - 4000K/3000K - ● W

Warrington: +44 (0) 1942 433333
Belfast: +44 (0) 2890 773750



Sleek LED Polycarbonate Bulkhead

Driver Includido

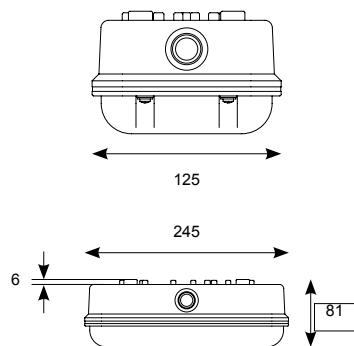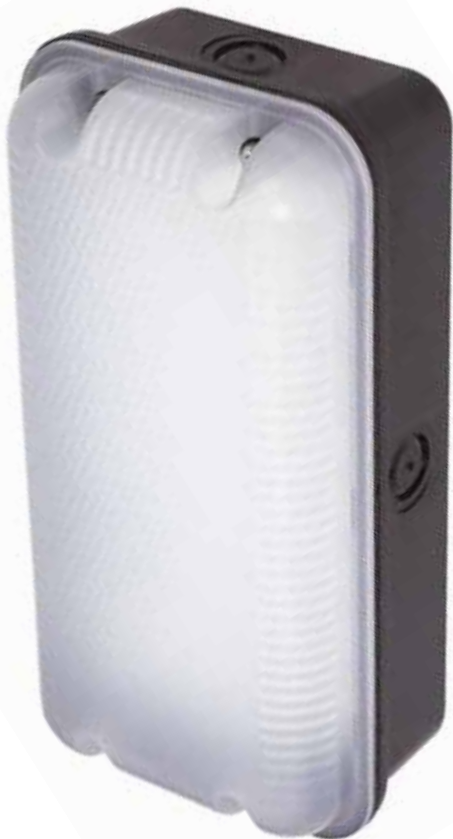



ASBLED	LED	6W 4000K
--------	-----	----------

/PC	
/MWS	


W	6W
Lm/D	440lm
Lm/W	73lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50Hz
Temp	0°C - 25°C

Sleek LED 110V Polycarbonate Bulkhead

Driver Incluido



124

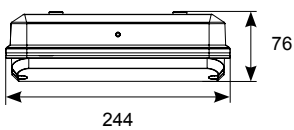

244

76



ASLED/DIFF/RED

W	5W
Lm/D	424lm
Lm/W	85lm
CRI	Ra 80
CCT	4000K
V	110V
Hz	50Hz
Temp	-10°C - 40°C

ASBLED/110V	LED	5W	
/PC			
/MWS			

Accesorios

ASBLED/DIFF/RED		
-----------------	--	--



E27 Aluminium Bulkhead


Lámpara No Incluida



A100PC



A100GC

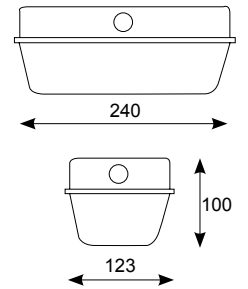

A100PC	E27	100W -	POLY
A100GC	E27	100W -	GLA

/PC	
------------	--


E27 Options		
100W	23W	20W
130	53	53
Maximum size and wattage		

E27 Polycarbonate Bulkhead

Lámpara No Incluida



319

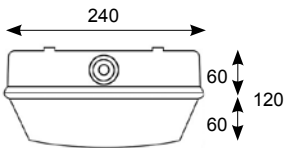

E27 Options		
100W	23W	20W
130	53	53
130		53
Maximum size and wattage		

A100POLY

E27



100W - ● B

/PC



Camini LED

Driver Incluido

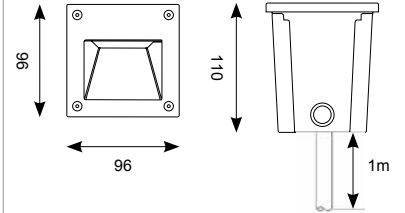

ACSQLEDWL LED 3W 4000K


W	3W
Lm/D	79lm
Lm/W	22lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 25°C

Parona LED

Driver Incluso



321

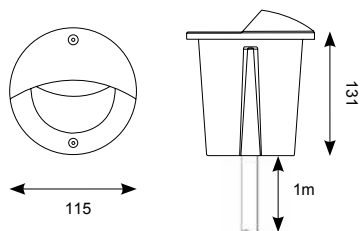



W	3W
Lm/D	178lm
Lm/W	45lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 25°C

APCLEDWL LED 3W 4000K



Mattone LED Uni-Bricklight CCT

Supplied c/w Integral Driver

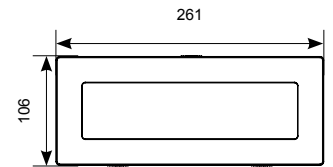

W	2W
Lm/D	
4000K	101lm
3000K	85lm
Lm/W	
4000K	51lm
3000K	43lm
CRI	Ra 80
CCT	4000K 3000K
V	230V
Hz	50Hz
Temp	-10°C to 40°C

AMATBLED	LED	2W - 4000K/3000K
----------	-----	------------------


Su fabricación integral y sólida de policarbonato proporciona una resistencia superior a la corrosión



Instalación con caja posterior; agiliza y simplifica la instalación y el mantenimiento

Las patas ajustables permiten instalarlo en cualquier tamaño de separación de ladrillos

El interruptor integral permite al instalador elegir entre las opciones de temperatura de color de 3000 K y 4000 K

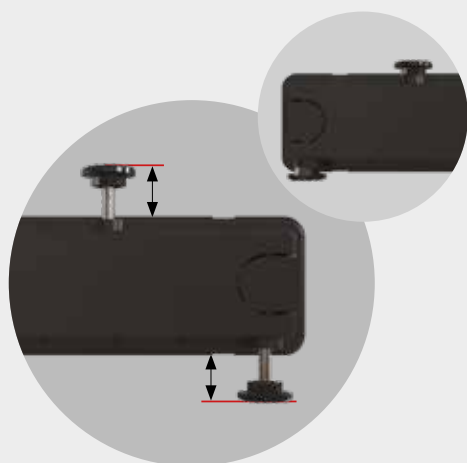


Diseño con patas ajustables

Su diseño exclusivo con patas ajustables permite su instalación en una amplia gama de separación de ladrillos, que va desde los 115 mm de altura hasta los 85 mm, asegurando su idoneidad y un ajuste preciso para diferentes tamaños de separación. Las patas permiten que el producto se mantenga en una posición fija durante la instalación, haciendo que sea rápida y sencilla



Plug and Play Diseño

El diseño plug and play permite que la placa frontal se desconecte temporalmente durante la instalación; de este modo, el instalador tiene un acceso más fácil para ajustar las patas y fijar la carcasa en su posición antes de aplicar el cemento en la estructura de la pared. El instalador simplemente volverá a conectar la placa frontal a la carcasa utilizando el conector plug and play

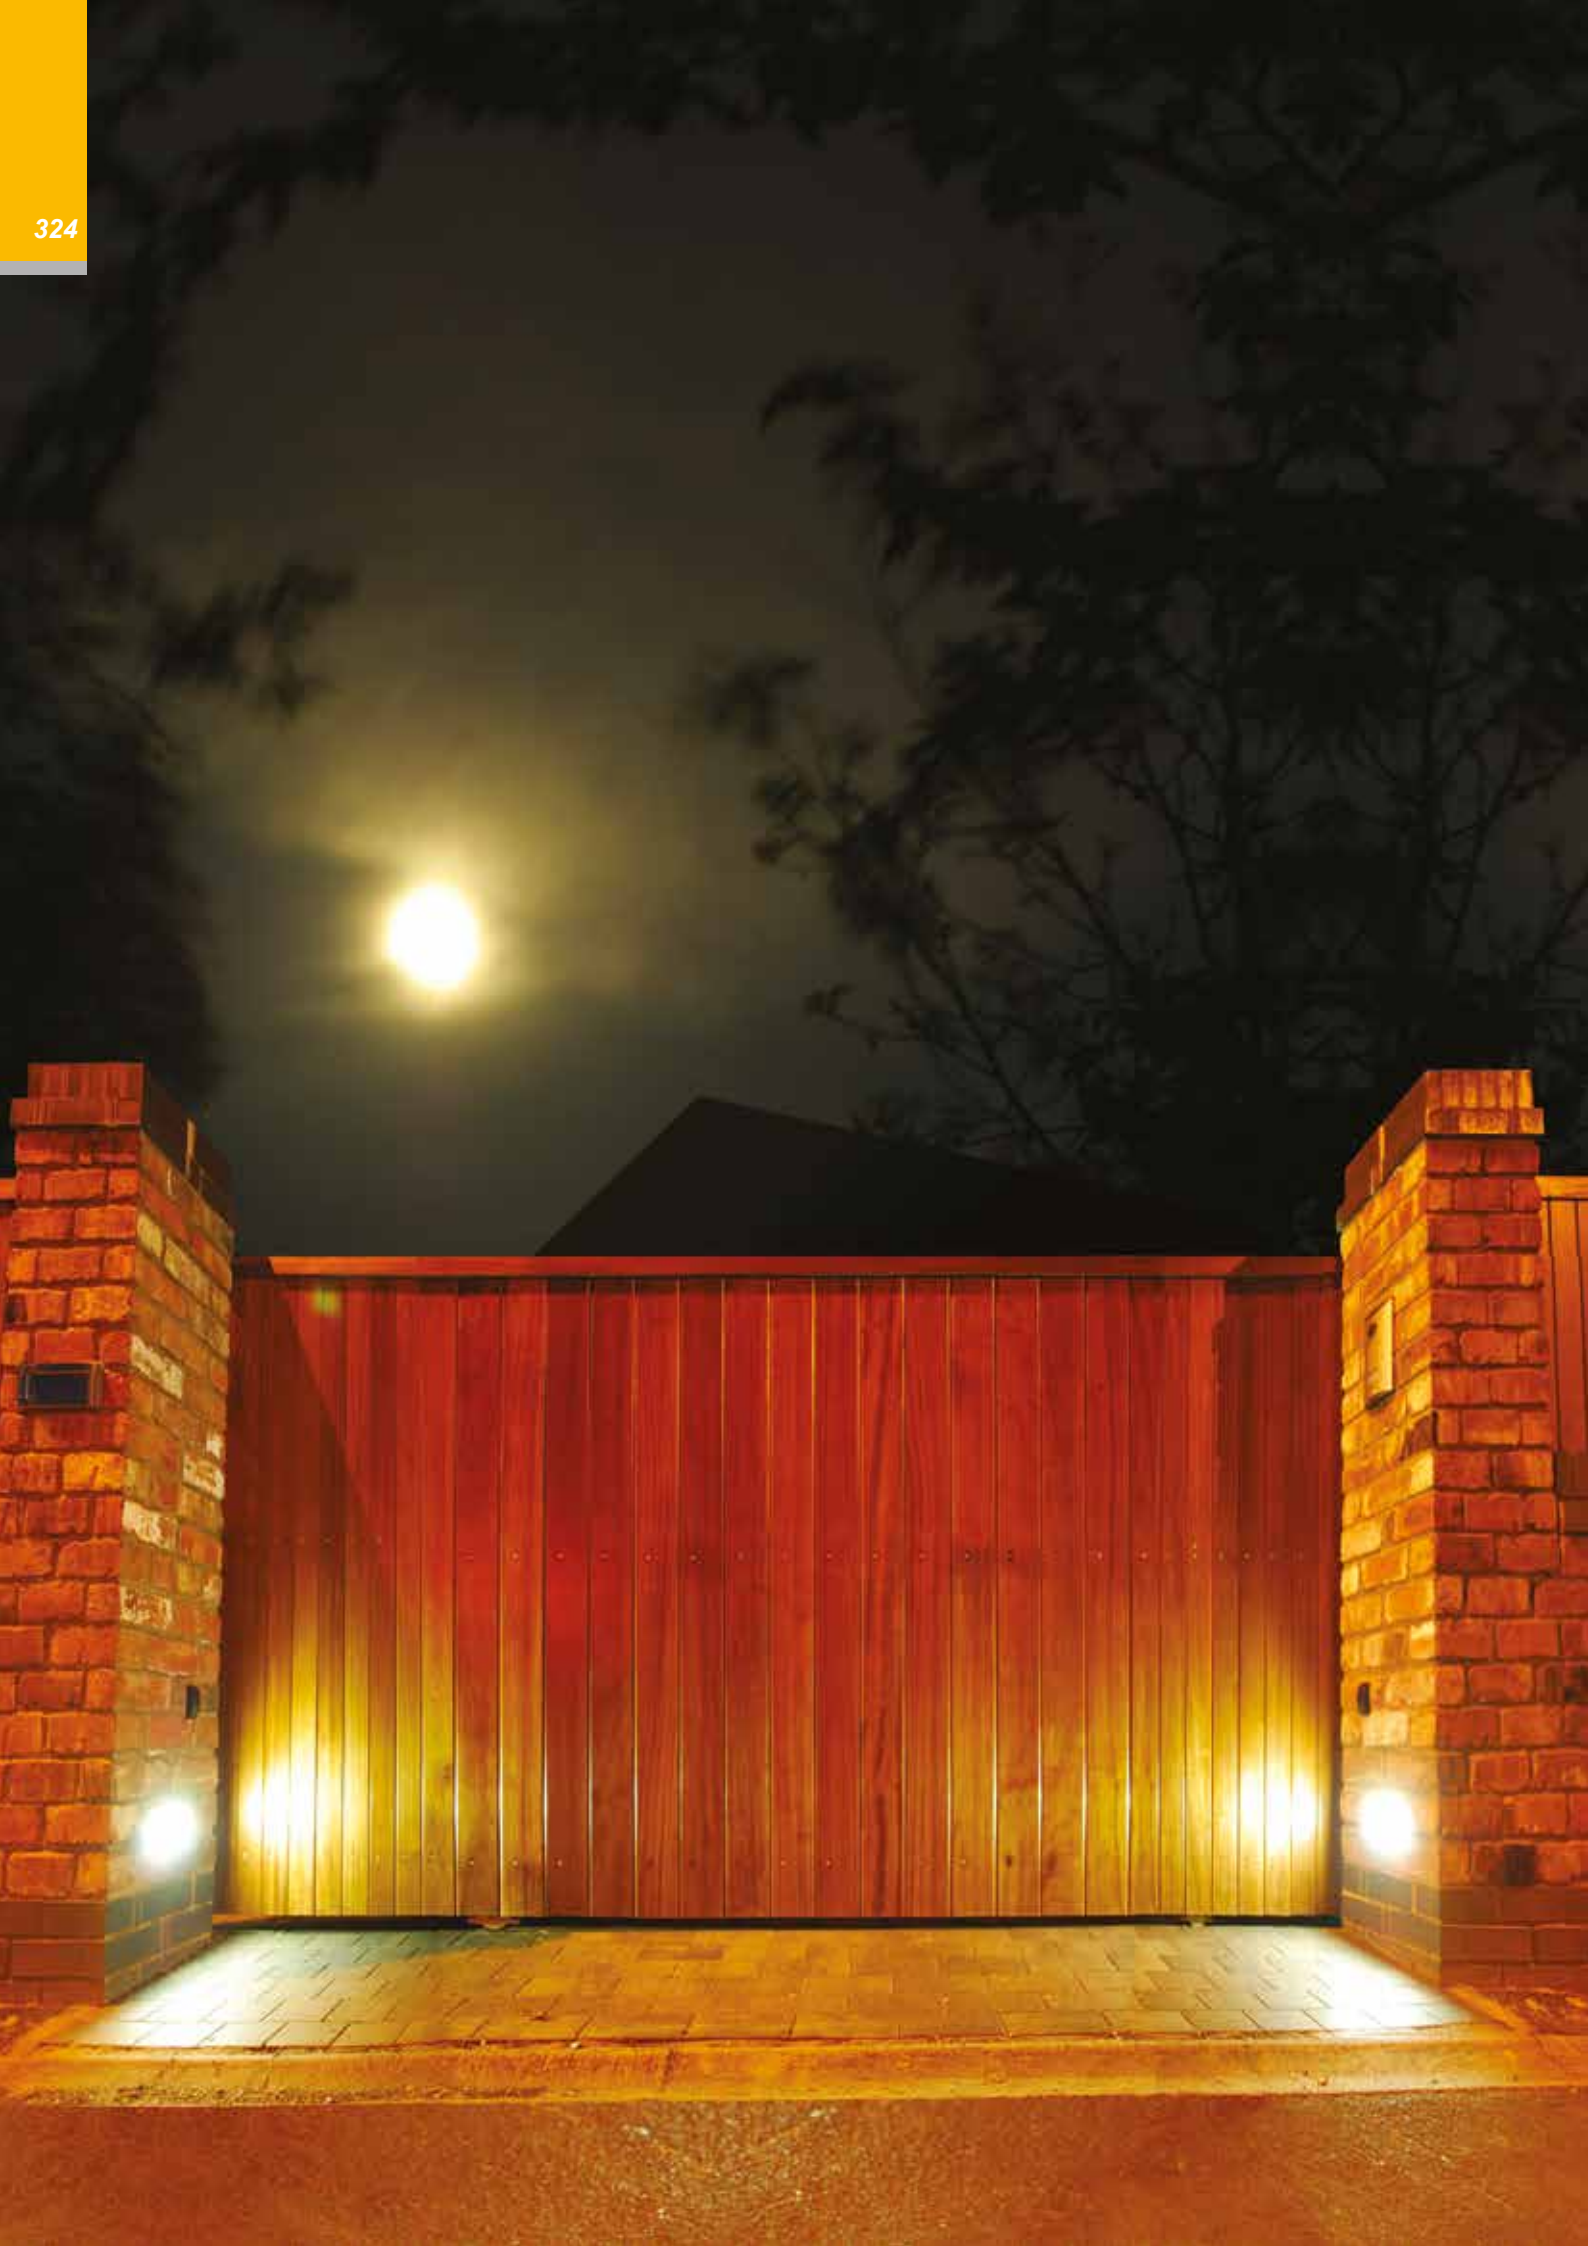

Libretto LED Bricklight

Driver Incluso





325



ALIBLED/BLU



ALIBLED/WHI

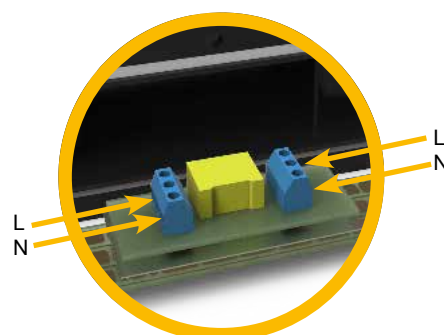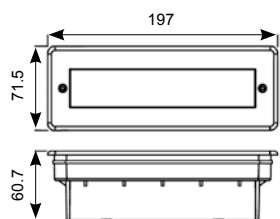

W	2W
Lm/D	
4000K	126lm
Blue	48lm
Lm/W 4000K	63lm
Lm/W Blue	24lm
CRI 4000K	Ra 65
CCT	6000K
V	220V-240V
Hz	50Hz
Temp	-10°C - 25°C

ALIBLED/WHI	LED	2W 4000K
ALIBLED/BLU	LED	2W Blue




Fidenza LED Bricklight

Driver Incluido

326




AFBILLED

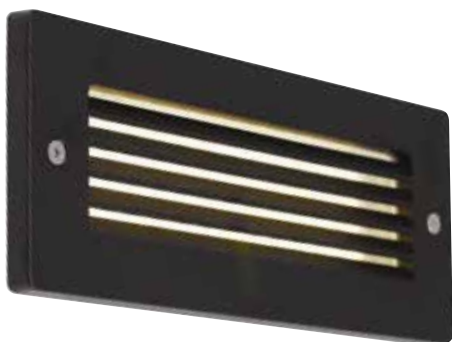

AFBILLED + AFBL/GRILL



AFBILLED + AFBL/EYE

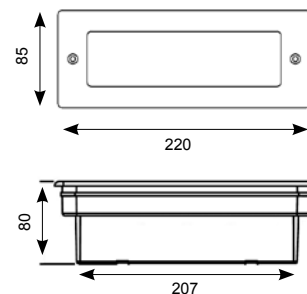

AFBILLED	LED	2.2W 4000K
-----------------	-----	------------

Accesorios






AFBL/GRILL	Front Grill Cover
AFBL/EYE	Front Eyelid Cover

W	2.2W
Lm/D	145lm
Lm/W	66lm
CRI	Ra 65
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 40°C



Volant LED

Driver Incluido

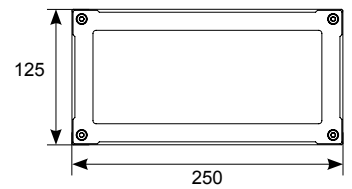




AVOLED5WL	LED	7W 4000K
-----------	-----	----------

W	7W
Lm/D	302lm
Lm/W	43lm
CRI	Ra 80
CCT	4000K
V	230V
Hz	50Hz
Temp	-10°C - 50°C

Calore E27

Lámpara No Incluida

329

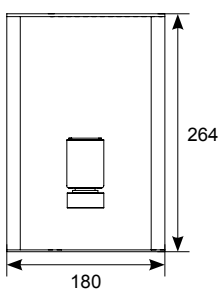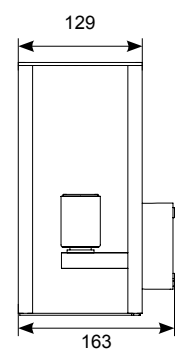

ACAL/E27 E27 40W



Latina LED Half Lantern

Driver Incluido

330




ALHLLLED/BL



ALHLLLED/PIR/W



8m
5sec - 8min
2 - 2000 LUX
Photocell Off

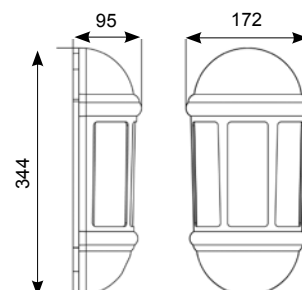

ALHLLLED/BL	LED	8W 3000K	● BL
ALHLLLED/WH	LED	8W 3000K	● WH

ALHLLLED/PC/BL	LED	8W 3000K	● BL
ALHLLLED/PC/WH	LED	8W 3000K	● WH

ALHLLLED/PIR/BL	LED	8W 3000K	● BL
ALHLLLED/PIR/WH	LED	8W 3000K	● WH

W	8W
Lm/D	400lm
Lm/W	53lm
CRI	Ra 80
CCT	3000K
V	230V
Hz	50/60Hz
Temp	-10°C - 40°C

Latina Polycarbonate Half Lantern


Lámpara No Incluida



331




8m
5sec - 8min
2 - 2000 LUX
PhotoCell Off

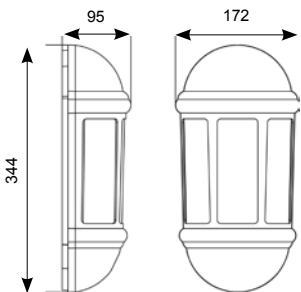

ALHL/BL



ALHL/PIR/WH



ALHL/BL	E27	42W		BL
ALHL/WH	E27	42W		WH
ALHL/PC/BL	E27	42W		BL
ALHL/PC/WH	E27	42W		WH
ALHL/PIR/BL	E27	42W		BL
ALHL/PIR/WH	E27	42W		WH

Latina LED Wall Lantern

Driver Incluido

332



ALWLLED/PIR/BL



ALWLLED/WH




ALWL/CBB

ALWL/CBW



8m
5sec - 8min
2 - 2000 LUX
Photocell Off

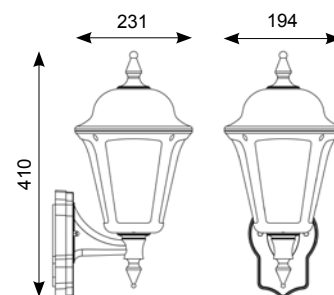

ALWLLED/BL	LED	8W 3000K	● BL
ALWLLED/WH	LED	8W 3000K	● WH
ALWLLED/PIR/BL	LED	8W 3000K	● BL
ALWLLED/PIR/WH	LED	8W 3000K	● WH

Accesorios

ALWL/CBB	Corner Bracket	● BL
ALWL/CBW	Corner Bracket	● WH

W	8W
Lm/D	546lm
Lm/W	68lm
CRI	Ra 80
CCT	3000K
V	230V
Hz	50/60Hz
Temp	-10°C - 40°C

Latina Polycarbonate Wall Lantern

Lámpara No Incluida



8m
5sec - 8min
2 - 2000 LUX
Photocell Off



ALWL/WH




ALWL/PIR/BL



ALWL/CBB



ALWL/CBW

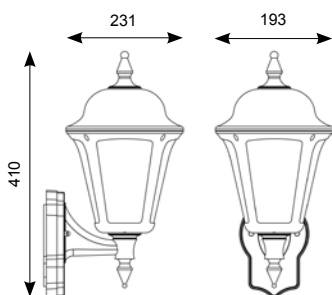

E27 Options	
42 W	20W 65
	140
Maximum size and wattage	

ALWL/BL	E27	42W		● BL
ALWL/WH	E27	42W		● WH
ALWL/PIR/BL	E27	42W		● BL
ALWL/PIR/WH	E27	42W		● WH

Accesorios

ALWL/CBB	Corner Bracket	● BL
ALWL/CBW	Corner Bracket	● WH




Pavia Solar LED

Driver Incluido

334




Modos operativos



Funciona con energía solar



6 - 10m
1 min
10 - 45 LUX

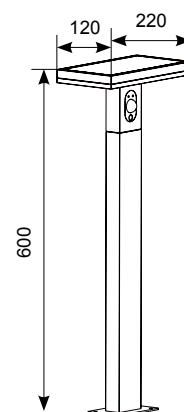

	APAVLEDB/60	LED	4000K
Batería	ASBP/17	7.4V 1500mAh Replacement Li-ION Battery	

Lm/D	230lm
CRI	Ra 80
CCT	4000K
Temp	-20°C - 45°C



Talana Solar LED

Driver Incluido




Modos operativos



Funciona con energía solar



6 - 10m
1 min
10 - 45 LUX

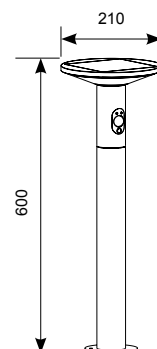

ATASLEDB/60	LED	4000K
--------------------	-----	-------

Batería

ASBP/17	7.4V 1500mAh Replacement Li-ION Battery	
----------------	---	--

Lm/D	210lm
CRI	Ra 80
CCT	4000K
Temp	-20°C - 45°C






Senza LED

Driver Incluso



339

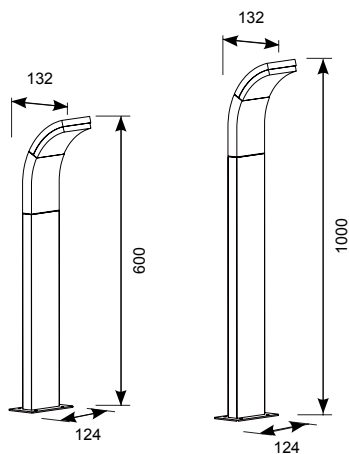

ASELEDB/060

ASELEDB/100

W	6.5W
Lm/D	366lm
Lm/W	52lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C - 45°C

ASELEDB/060	LED	6.5W - 4000K 600mm
ASELEDB/100	LED	6.5W - 4000K 1000mm



Arco LED

Driver Incluido


340



AARLEDB/060



AARLEDB/100



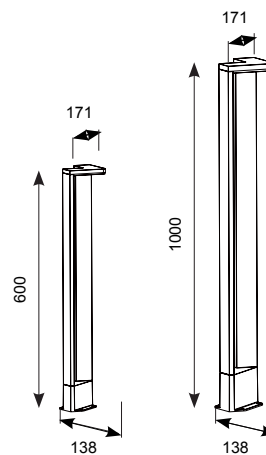


AARLEDB/060	LED	11W 4000K
AARLEDB/100	LED	11W 4000K

W	11W
Lm/D	643lm
Lm/W	58lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C - 45°C





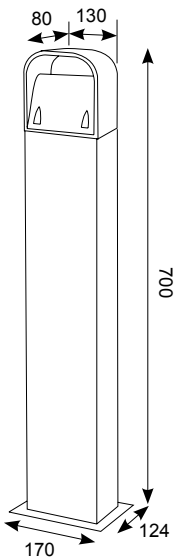

W	11W
Lm/D	
4000K	202lm
3000K	578lm
Lm/W	
4000K	18lm
3000K	53lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	-20°C to 40°C

AGLEDB/700	LED	11W - 4000K 700mm
AGLEDB/700/WW	LED	11W - 3000K 700mm




Brock LED Bollard

Driver Incluido

344



Kit de montaje de raiz
c/w suministrado

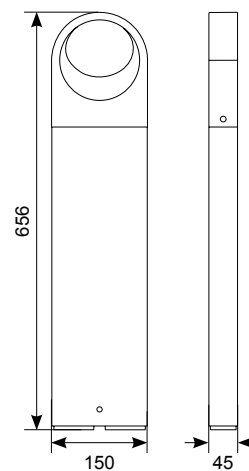

W	7.7W
Lm/D	
4000K	452lm
3000K	447lm
Lm/W	
4000K	57lm
3000K	56lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50Hz
Temp	-20°C - 25°C

ABRLEDB/650/CW	LED	7.7W - 4000K 650mm
ABRLEDB/650/WW	LED	7.7W - 3000K 650mm



Duet LED

Driver Incluido


346



Distribucion de Luz desde la parte trasera del bolardo



Distribucion de Luz desde el frente del bolardo

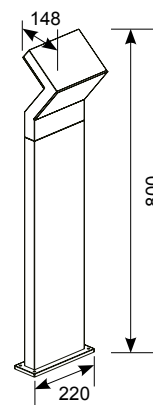

ADULEDB/080

LED

17W - 4000K 800mm






W	17W
Lm/D	1536lm
Lm/W	90lm
CRI	Ra 80
CCT	4000K
V	100V-240V
Hz	50/60Hz
Temp	-20°C to 45°C





Taurus LED

Driver Incluido

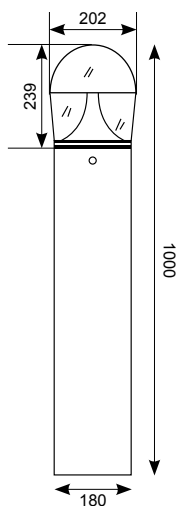

Emergency Operation

W	25W
Lm/D	2390lm
Lm/W	96lm
CRI	Ra 70
CCT	4000K
V	230V
Hz	50/60Hz
Temp	-25°C to 50°C



ATALEDB/1000



ATALEDB/1000/PIR

ATALEDB/1000	LED	25W - 4000K 1000mm
ATALEDB/1000/PIR	LED	25W - 4000K 1000mm -

/M3	
------------	--



Leo CCT LED Polycarbonate Bollard

Driver Incluido

350



3YR



Powered by
TRIDONIC
enlightening your ideas




POLY



ALEOLED/CCT/045/GR

ALEOLED/CCT/075/GR

ALEOLED/CCT/100/GR

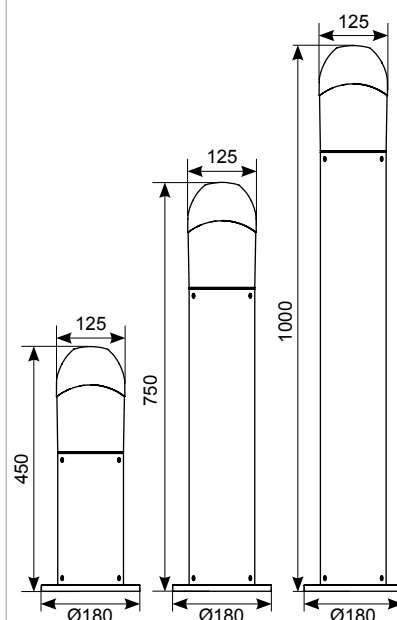

W	8W
	13W
	13W

Lm/D	4000K	3000K
8W	592lm	533lm
13W	922lm	880lm
13W	922lm	880lm

Lm/W		
8W	74lm	67lm
13W	77lm	73lm
13W	77lm	73lm

CRI	Ra 80
CCT	3000K
	4000K

V	230V
---	------



Hz	50/60Hz
----	---------

Temp	-10°C to 40°C
------	---------------


ALEOLED/CCT/045/GR	LED	8W - 4000K/3000K 450mm
ALEOLED/CCT/075/GR	LED	13W - 4000K/3000K 750mm
ALEOLED/CCT/100/GR	LED	13W - 4000K/3000K 1000mm

Libra

Lámpara No Incluida



351

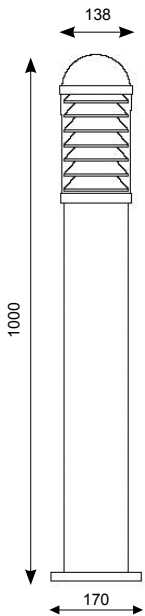

E27 Options		
100W	23W	20W
130	53	53


Maximum size and wattage

ALIB/100E27	E27	100W
-------------	-----	------



Orno LED Portable Lantern


352




AORNLED/PL1



AORNLED/PL2



AORNLED/PL1

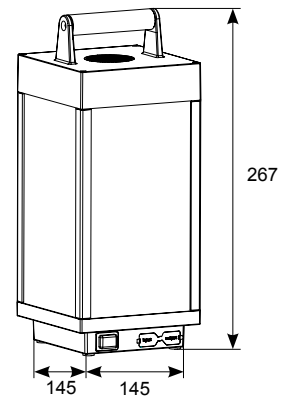

AORNLED/PL2

AORNLED/PL1	LED	5W 4000K
AORNLED/PL2	LED	6W 4000K

W	5W
Lm/D	353lm
Lm/W	71lm
CRI	Ra 80
CCT	4000K
	3.7VDC
Temp	-20°C - 45°C



Lazer AC LED Projector

No Necesita Driver




Accesorio cruzado antirreflejos



Accesorio en forma de capucha



DCA

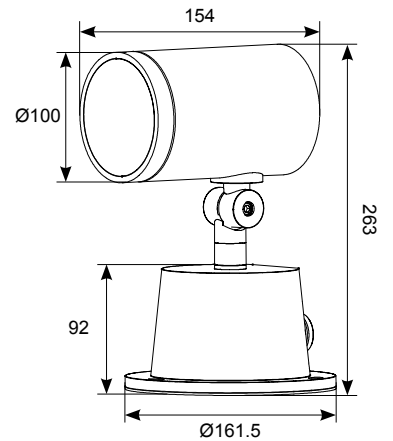

ALAZPLED2	LED	30W - 3000K
------------------	-----	-------------

ALAZPLED/C	Accesorio cruzado antirreflejos
-------------------	---------------------------------

ALAZPLED/H	Accesorio en forma de capucha
-------------------	-------------------------------


W	30W
Lm/D	2581lm
Lm/W	86lm
CRI	Ra 80
CCT	3000K
V	220-240V
Hz	50Hz
Temp	-20°C to 40°C

Rondo HP AC LED Surface/Spike Light

No Necesita Driver



355

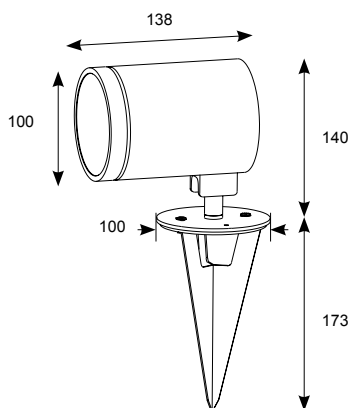




W	20W
Lm/D	1200lm
Lm/W	60lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C - 40°C

AROLEDSSS	LED	20W 4000K
-----------	-----	-----------



Meteor LED Submersible

Driver No Includo

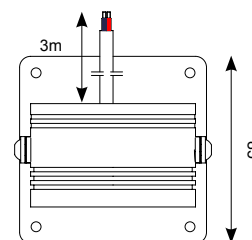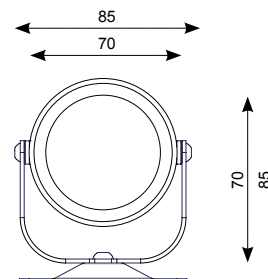

AMETLED	LED	6W 4000K
----------------	-----	----------



Controladores

AD9W/350	9W 350mA LED Driver
ADK20W/350	20W 350mA LED Driver
AMCD25W	0-15W Multicurrent Driver
AMCD50W	0-20W Multicurrent Driver




W	6W
Lm/D	547lm
Lm/W	91lm
CRI	Ra 75
CCT	4000K
V	350mA
Temp	-20°C - 40°C

Garda GU10 LED

Se entrega sin lámpara



357

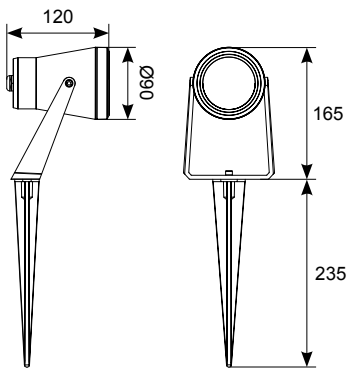


AGAR/GU10	GU10	5W LED GU10
-----------	------	-------------



Subra LED Inground Uplight

Driver No Incluido



358



ASUWOLED/CW



ASUWOLED/WW

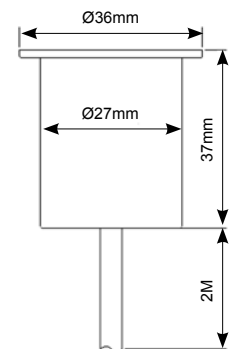

ASUWOLED/CW	LED	1W 4000K
ASUWOLED/WW	LED	1W 3000K

Controladores

ADK15W/24V	15W 24V LED Driver
ADK60W/24V	60W 24V LED Driver
AMCD25W	10 - 20W Multicurrent LED Driver

W	1W
Lm/D	
4000K	35lm
3000K	35lm
Lm/W 4000K	35lm
Lm/W 3000K	35lm
CRI 4000K	Ra 75
CRI 3000K	Ra 80
CCT 4000K	6000K
CCT 3000K	3000K
V	12V-24V
Temp	-20°C - 45°C



Turlock LED Inground Uplight

Driver Incluido

360



ATURWOLED/70

Powered by



ATURWOLED/70/WW






Mini Drive de 2 vías sobre la cubierta



Mini Drive de 4 vías sobre la cubierta

ATURWOLED/70	LED	3W - 4000K
ATURWOLED/70/WW	LED	3W - 3000K

ATURWOLED/70/2	Mini Drive de 2 vías sobre la cubierta
ATURWOLED/70/4	Mini Drive de 4 vías sobre la cubierta

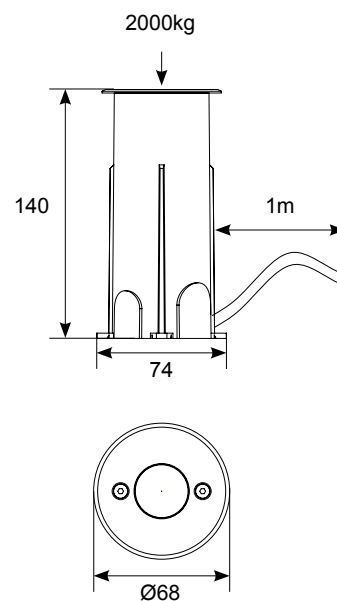

W	3W
Lm/D	
4000K	135lm
3000K	124lm
Lm/W	
4000K	45lm
3000K	41lm
CRI	Ra 80
CCT	4000K 3000K
V	230V
Hz	50/60Hz
Temp	-20°C to 25°C



Turlock LED Inground Uplight

Driver Incluido





Powered by



ATURWOLED/95



ATURWOLED/95/WW

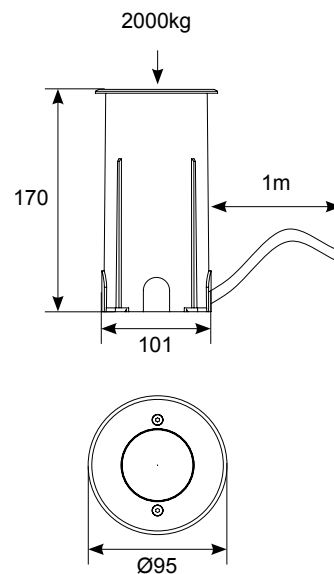

W	4W
Lm/D	
4000K	390lm
3000K	301lm
Lm/W	
4000K	97lm
3000K	75lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	-20°C to 25°C


ATURWOLED/95	LED	4W - 4000K
ATURWOLED/95/WW	LED	4W - 3000K

Turlock LED Inground Uplight

Driver Incluso



363



Powered by


HEP



ATURWOLED/175



ATURWOLED/175/WW

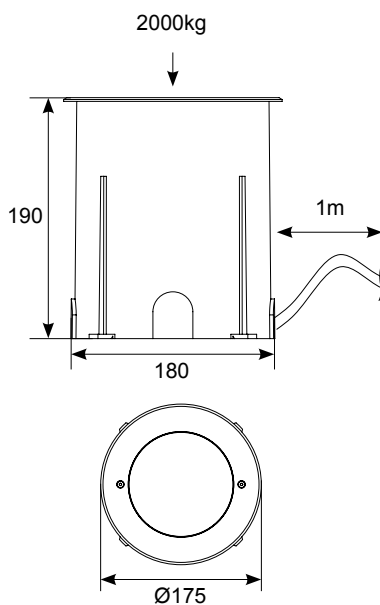

W	8W
Lm/D	
4000K	884lm
3000K	785lm
Lm/W	
4000K	110lm
3000K	98lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	-20°C to 25°C

ATURWOLED/175 LED 8W - 4000K

ATURWOLED/175WW LED 8W - 3000K



Turlock LED Inground Uplight

Driver Incluido






Powered by



ATURWOLED/230



ATURWOLED/230/WW


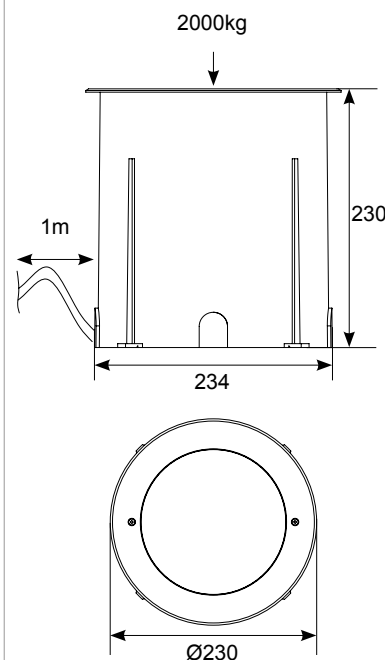




W	19W
Lm/D	
4000K	2214lm
3000K	2021lm
Lm/W	
4000K	116lm
3000K	106lm
CRI	Ra 80
CCT	4000K
	3000K
V	230V
Hz	50/60Hz
Temp	-20°C to 25°C

ATURWOLED/230	LED	19W - 4000K
ATURWOLED/230/WW	LED	19W - 3000K

Fresno LED Adjustable Inground Uplight

Supplied c/w Integral Driver

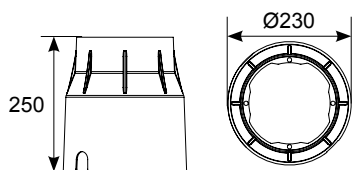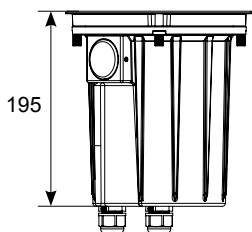

Installation Sleeve



Ángulo del haz ajustable 30°

W	15W
Lm/D	
4000K	1092lm
3000K	903lm
Lm/W	
4000K	73lm
3000K	60lm
CRI	Ra 80
CCT	3000K 4000K
V	230V
Hz	50Hz
Temp	-20°C to 40°C

AFRWOLED/185 LED 15W - 3000K






AFRWOLED/185/CW LED 15W - 4000K



Fresno LED Adjustable Inground Uplight

Driver Incluido

366

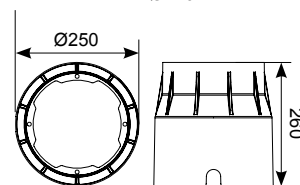

Installation Sleeve



Ángulo del haz ajustable 30°


W	20W
Lm/D	
4000K	1076lm
3000K	998lm
Lm/W	
4000K	54lm
3000K	50lm
CRI	Ra 80
CCT	3000K 4000K
V	230V
Hz	50Hz
Temp	-20°C to 40°C

AFRWOLED/220 LED 20W - 3000K


AFRWOLED/220/CW LED 20W - 4000K

Fresno LED Adjustable Inground Uplight

Driver Incluido



367

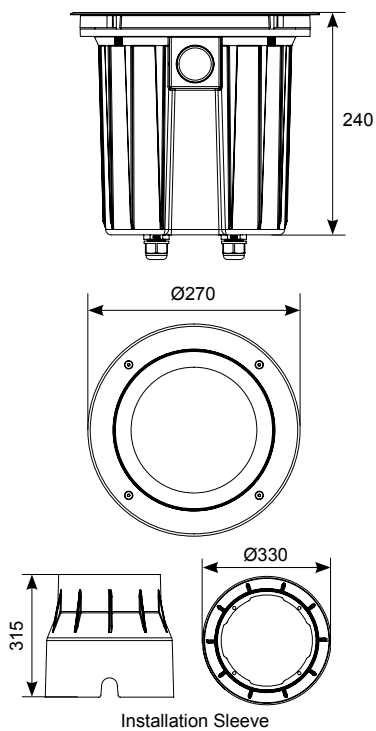

Ángulo del haz ajustable 30°

W	30W
Lm/D	
4000K	1938lm
3000K	1770lm
Lm/W	
4000K	65lm
3000K	59lm
CRI	Ra 80
CCT	3000K
	4000K
V	230V
Hz	50Hz
Temp	-20°C to 40°C



AFRWOLED/270	LED	30W - 3000K
AFRWOLED/270/CW	LED	30W - 4000K



GU10/MR16 Inground Uplight

Lámpara No Incluida

368



GU10



GU10



MR16



95
With
Sleeve




80
Without
Sleeve



DCA



SS
316L

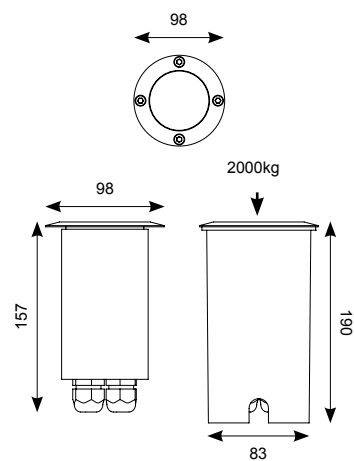

AWO50

GU10/MR16


50W

GU10 Adjustable Inground Uplight

Lámpara No Incluida



369

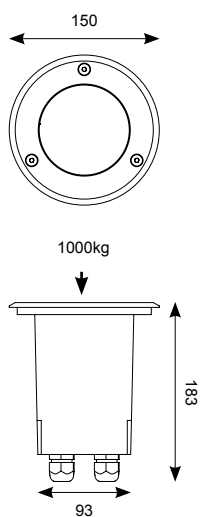

AWO/GU10 GU10 50W

